Britelite®
TM



CONTENTS


Thank you for choosing Britelite™ Sentinel series Aircraft Aluminum Alloy Rechargeable flashlight system, a remarkable handy flashlight. It is manufactured to the highest quality standards and we hope that it will give you many years of trouble-free use.

As with any fine instrument, due care and maintenance of this product will provide years of dependable service.

Please read this manual before using your Britelite™ flashlight. It includes important safety and operating instructions.



Familiarization

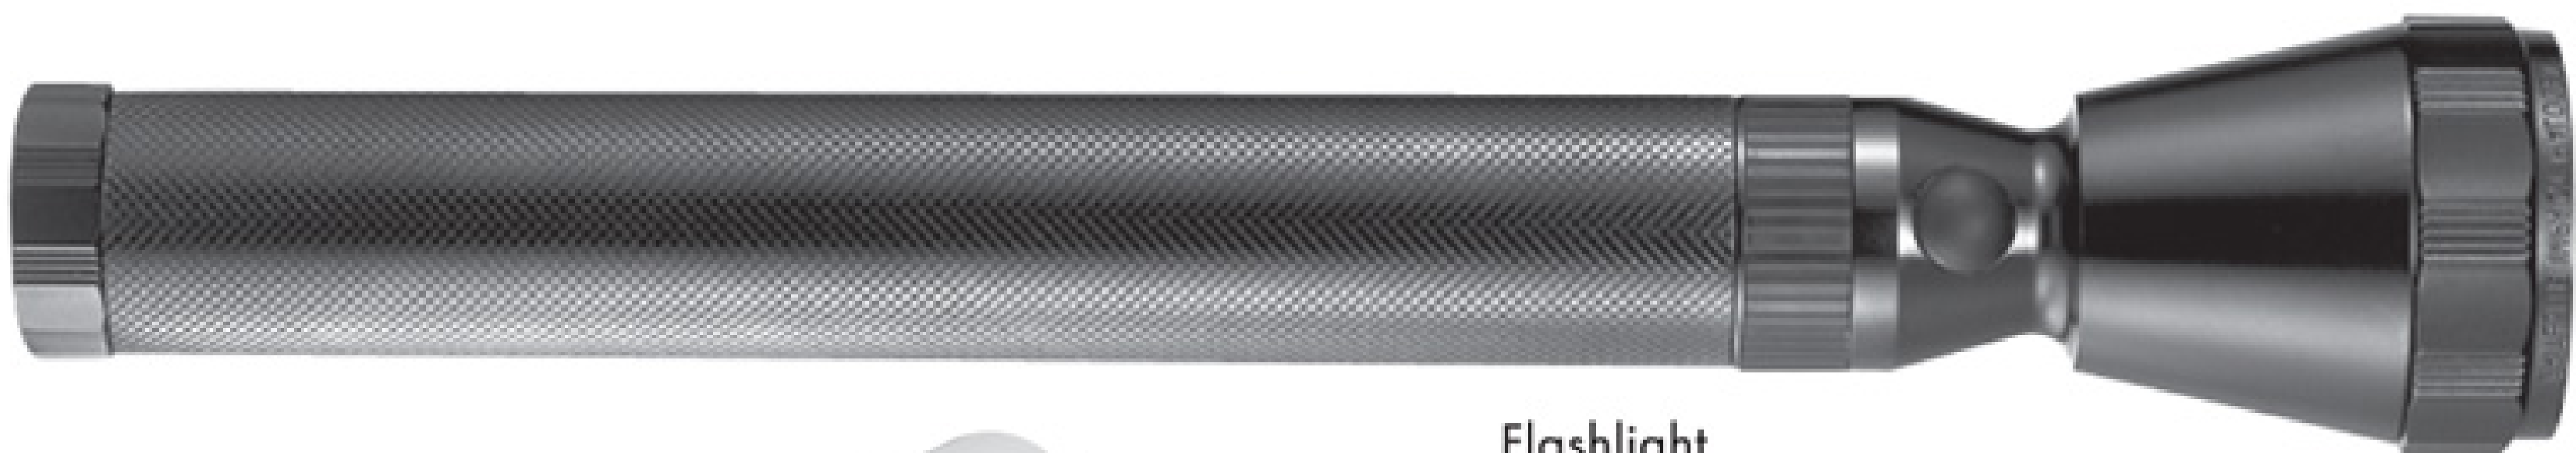

Flashlight



Battery



Cigarette Lighter Adaptor (12V DC)*



Wall Mounting Bracket*




100~240V AC Adaptor

*Optional


Britelite™ flashlight is covered by one or more of the following patents:
Des.417,023, Des.418,933

Identification

LED FLASHLIGHT

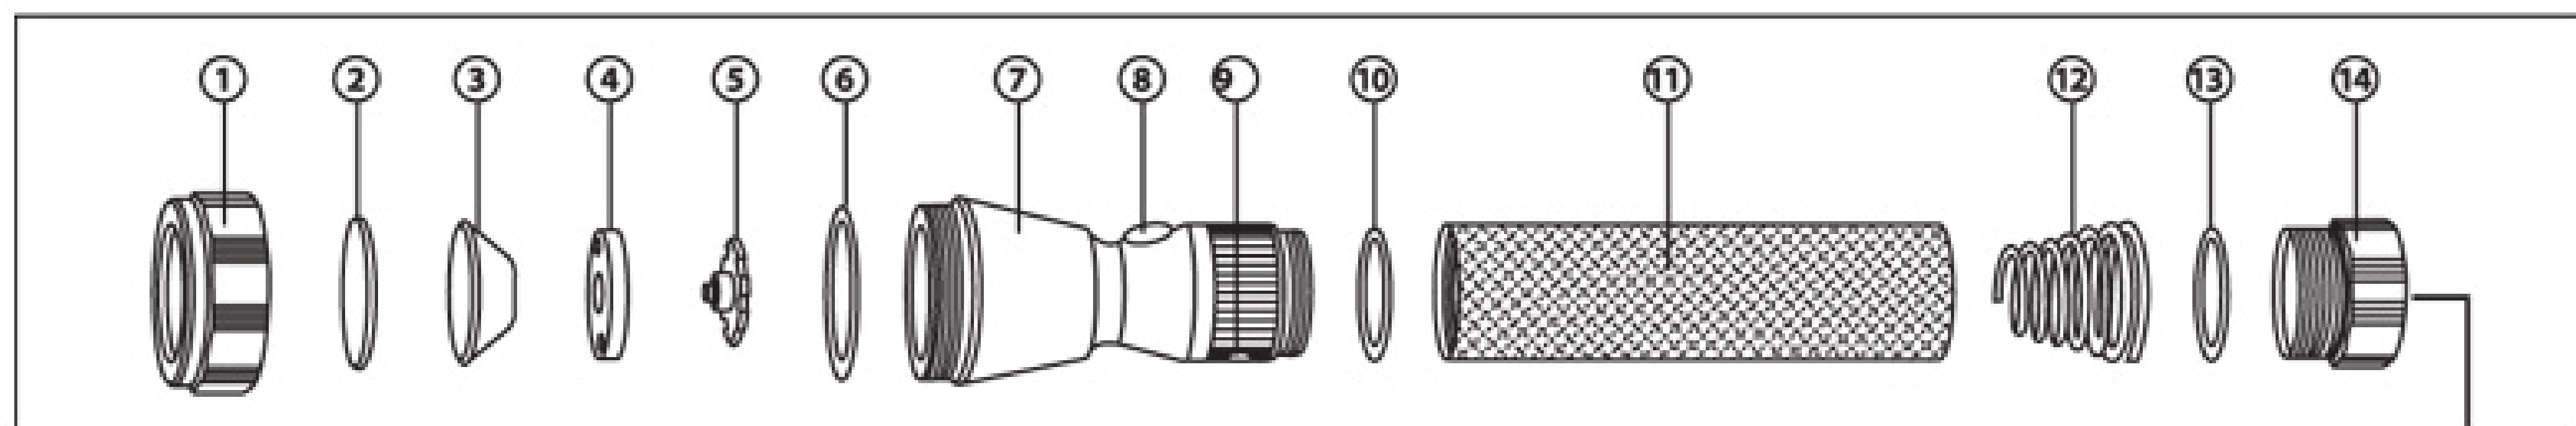

1- Face Cap
2- Lens
3- Reflector
4- LED Fixture
5- LED
6- 'O' Ring
7- Head
8- Switch
9- Charging Receptacle
10- 'O' Ring
11- Barrel
12- Tail Cap Spring
13- 'O' Ring
14- Tail Cap
15- Buzzer Switch (for models with Buzzer function)

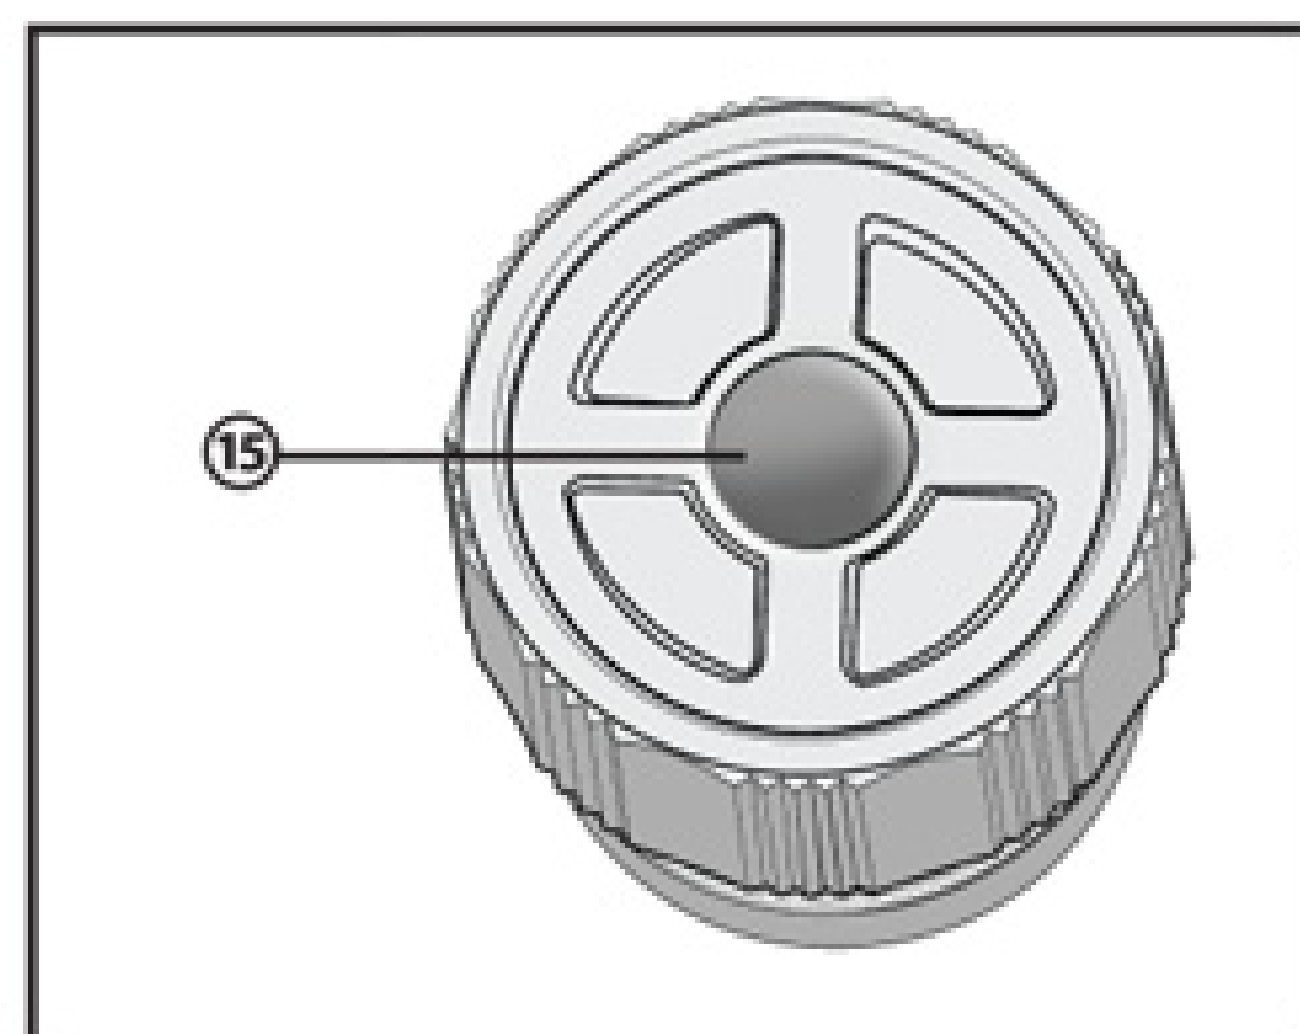


Specifications

Model Name	Length	Weight	Material
Bravura Xenon	297.5mm	0.32 kg	Aircraft Aluminum
Armor Xenon	262mm	0.31 kg	Aircraft Aluminum
Xplorer Xenon	270mm	0.18 kg	Aircraft Aluminum
Zafari Xenon	236mm	0.16 kg	Aircraft Aluminum
Travel Xenon	190mm	0.08 kg	Aircraft Aluminum
Wazp LED	201mm	0.11 kg	Aircraft Aluminum
Merqry LED	280mm	0.16 kg	Aircraft Aluminum
Zequra LED	270mm	0.23 kg	Aircraft Aluminum
Spiker LED	260mm	0.19 kg	Aircraft Aluminum
Glanz LED	226mm	0.18 kg	Aircraft Aluminum
Kamper LED	236mm	0.22 kg	Aircraft Aluminum
Ezkort LED	267mm	0.32 kg	Aircraft Aluminum
Challenge LED	342mm	0.55 kg	Aircraft Aluminum
Camelot LED	300mm	0.30 kg	Aircraft Aluminum
Dream LED	191mm	0.15 kg	Aircraft Aluminum
Invader LED	263mm	0.24 kg	Aircraft Aluminum
Preiz LED	260mm	0.28 kg	Aircraft Aluminum
Merqry LED Turbo Plus	213mm	0.18 kg	Aircraft Aluminum
Wazp LED Plus	197mm	0.09 kg	Aircraft Aluminum
Elfin LED Plus	142mm	0.07 kg	Aircraft Aluminum
Trost LED Plus	156mm	0.10 kg	Aircraft Aluminum
Auster LED Turbo Plus	265mm	0. 20kg	Aircraft Aluminum
Reise LED Turbo Plus	231mm	0. 19kg	Aircraft Aluminum
Galloper Buzzer LED	342mm	0.55 kg	Aircraft Aluminum
Octavia Buzzer LED	300mm	0.30 kg	Aircraft Aluminum

*Note: Operating time varies with different switch mode operation.

Specifications

Lamp	Battery Type	Charging Time	Run Time
Xenon	4x1/2D Ni-cad 2200mAH	8 hours	180 minutes
Xenon	3x1/2D Ni-cad 2200mAH	8 hours	180 minutes
Xenon	4x4/5SC Ni-cad 1300mAH	8 hours	90 minutes
Xenon	3x4/5SC Ni-cad 1300mAH	8 hours	90 minutes
Xenon Bi-pin	2xAA Ni-cad 700mAH	8 hours	90 minutes
1W LED	2xAA Ni-cad 700mAH	8 hours	60 minutes
1W LED	2xSC Ni-cad 1900mAH	8 hours	180 minutes
3W LED	4x4/5SC Ni-cad 1300mAH	8 hours	90 minutes
3W LED	4x4/5SC Ni-cad 1300mAH	8 hours	90 minutes
3W LED	3x4/5SC Ni-cad 1300mAH	8 hours	90 minutes
1W LED	3x4/5SC Ni-cad 1300mAH	7 hours	210 minutes
3W LED	2xD Ni-cad 5000mAH	10 hours	240 minutes
3W LED	3xD Ni-cad 5000mAH	10 hours	450 minutes
3W LED	3xC/Ni-cad 2800mAH	8 hours	270 minutes
3W LED	3.7V 2.2AH Lithium-Ion	8 hours	180 minutes
1W LED	3xSC Ni-cad 1900mAH	7 hours	360 minutes
3W LED	3x1/2D Ni-cad 2200mAH	8 hours	180 minutes
3W LED	2xSC Ni-cad 1900mAH	8 hours	90 minutes
1W LED	2xAA Ni-cad 700mAH	8 hours	60 minutes
1W LED	1xAA Ni-cad 700mAH	8 hours	45 minutes
1W LED	2x2/3A Ni-cad 700mAH	8 hours	60 minutes



Safety Measures

A. This manual contains important safety and operating instructions in operating your Britelite™ and charger.

B. NEVER DEEP DISCHARGE NICKEL-CADMIUM BATTERIES.
Read the instructions under 'Care and use of Nickel Cadmium Batteries' in this manual.

C. CAUTION. In order to reduce the risk of fire, electrical shock, or personal injury, NEVER attempt to use this charger with any other attachment or unit. Likewise, DO NOT attempt to charge the Britelite™ with any other charger.
WARNING. Do not keep your Britelite™ with its face against any surface while in operation. The resultant heat build-up can cause a fire.

D. NEVER MISTREAT THE CORD. Never carry the charger by the cord or pull it to disconnect the charger from receptacle.

E. AVOID the use of an extension cord. CONNECT THE CHARGER DIRECTLY INTO AN ELECTRICAL OUTLET.

F. REPLACE damaged charger cords or plugs immediately, prior to use.

G. REMOVE Britelite™ FROM POWER SOURCE PRIOR TO ATTEMPTING ANY ROUTINE CLEANING OR MAINTENANCE. DO NOT try to repair the unit or charger yourself. Take it to a qualified Britelite™ service facility.


H. DO NOT INCINERATE THE BATTERY, EVEN IF IT IS SEVERELY DAMAGED OR COMPLETELY

I. WORN OUT. The batteries can explode in a fire. Handle the battery stick carefully and never attempt to short circuit.
A SMALL LEAKAGE OR LIQUID FROM THE BATTERY CELLS MAY OCCUR UNDER EXTREME USAGE OR TEMPERATURE CONDITIONS. This does not necessarily indicate a failure. However, if the outer case seal is broken and the leakage gets on your skin:
1 - Wash promptly with soap and water.
2 - Neutralize with a mild acid, such as lemon juice or vinegar.
3 - If battery liquid gets into your eyes, flush them clear with water for a minimum of 10 minutes and seek immediate medical attention. (Medical Note: The liquid is a 25-35% solution of potassium hydroxide.)

J. Use of this product for other than a lighting device is not recommended.

K. Always observe battery polarity. A reversed battery will damage the BriteliteTM when charging is attempted. Never attempt to charge any batteries other than the Nickel-Cadmium type battery that is BriteliteTM original equipment. Recharging of any other type of batteries will damage the light.

L. If you do not use the flashlight for longer periods (three months or more), remove the battery to avoid chemical damage (acid leak).



Safety Measures

M. Constant contact with sunlight, water, chemicals, gases, etc. may cause color fading and may eventually damage the protective finish on the external case components.

N. Never attempt to touch the lamp before a two minute cooling time from its last 'on' time. Serious burns may result.



Routine Maintenance

BATTERY PACK - Once in every three months, remove the battery pack from the flashlight and visually inspect for signs of gas or chemical leakage. If any signs are observed the battery pack should be removed from service to prevent chemical damage to the inside of the flashlight.

CONNECTIONS - The non-anodized metal groove between the tail cop barrel must be cleaned periodically to ensure a good electrical contact. Keep the tail cap spring also clean.

O-RINGS AND GROOVE THREADS - To keep 'O'rings from drying out and the threads operating smoothly, apply clean petroleum jelly to the surfaces two or three times a year.

OPERATING INSTRUCTIONS

Operating the Switch

PLUS SERIES MODEL

Mode 1: Press the switch once and the flashlight will run on 100% brightness. Press the switch again to turn OFF the flashlight.

Mode 2: When the flashlight is running on100% brightness. Press the switch again for two seconds, the light would slowly decrease circularly from 100% to 15% brightness level, Press the switch again to turn OFF the flashlight. This mode is called the energy saving mode.

Mode 3: In the OFF position, press and hold the switch for 2 seconds and the flashlight will run on 30% brightness.

Other Models

Press the switch once to turn ON the flashlight. Press it again to turn OFF.

Buzzer Switch Operation (for models with Buzzer function).

Press the RED color button on the centre of the tail cap to turn ON the Buzzer.Press it again to turn OFF the Buzzer.

CAUTION:

To protect the buzzer from water seepage, always wear the rubber cap on the tail cap of the flashlight, during rain.

MOUNTING THE CHARGER

The Britelite™ rechargeable flashlight system should never be mounted against any vinyl or heat sensitive surface, while charging. AC and DC power cords are available. To charge the flashlight, switch 'off' and insert the charge plug firmly into the flashlight receptacle. Connect the charger to an appropriate power source.




AC Charging Adaptor

Connect the adaptor cord to the flashlight charging receptacle, only with the AC power source in the 'off' position. Otherwise, it may result in the damage of the recharging system. See 'Specifications' for details regarding charging time.



Note: This charging adaptor is designed for indoor use only.



Installing The DC Option

The DC Adaptor is offered as an option for those who would like to mount a Britelite™ Rechargeable Flashlight system in their vehicle.

When installing or using the Britelite™ flashlight in a vehicle, always be sure that the flashlight case does not touch the chassis. This can result in damage to the flashlight.

Plug the DC power cord's adaptor into the cigarette lighter receptacle of the vehicle. Do not leave the adaptor plugged in for any extended period while the engine is 'off' to avoid draining of the battery.



Battery Installation

Unscrew the tail cap and insert the battery pack into the barrel. The positive end (+) with a button, goes into the barrel first. Now replace the tail cap and make sure it is tight.

To avoid any operation problems during shipping, it has been packaged in an UNCHARGED state. In order to attain optimum operating time, the flashlight should be charged 10 hours before use.



Focusing

Rotate the face cap of the flashlight to obtain the best spot pattern and beam focus.



Charging

Ensure to fully charge the battery pack before use. Several charge/discharge cycles are required to achieve full battery capacity. The Britelite™ flashlight is protected against overcharging. See 'Care and use of Nickel-Cadmium Batteries' for additional battery information.

To charge the Britelite™ flashlight, switch 'off' and insert the charge plug firmly into the flashlight receptacle. Connect the charger to the power source. Charge time differs depending on model of flashlight. See Specifications.

With the proper lamp installed, the Britelite™ flashlight should run at least an hour after full charge. Operating time varies depending on model of the flashlight. See 'Specifications'.



NOTE: Leaving the flashlight 'on', once the lamp has become dim, can damage the battery.



Care And Use Of Rechargeable Batteries

Nickel-Cadmium Battery

1- Thoroughly read the section in this manual concerning safety measures and charging the Britelite™.

2- Fully charge before first use or when the flashlight has not been used for a long period of time.

3- Although the Britelite™ is designed to protect overcharging, there are exceptions. If the surrounding temperature is below 10 degree F, continuous charging is not recommended. Additionally, if the light is going to be unused for three months or more, remove from charge.

4- There are special considerations to note when using multi-cell rechargeable Nickel-Cadmium batteries, such as those found in certain Britelite™ flashlights. If a Nickel-Cadmium battery is subject to repeated and extensive over-deep discharges, such as an aggressive conditioning procedure to eliminate "memory", which runs the battery down completely on a regular basis, it can experience a voltage reversal in one of the five cells. This can cause a build up of pressure inside the cell which could lead to venting of the electrolyte, cell damage and early battery failure. In addition, should the pressure relief vent on the top of the battery stick become damaged, this pressure build up could lead to the cell's bursting and possible injury.

5- To obtain the safest and longest service from your rechargeable products, we offer the following recommendations:

a) Do not deep discharge Nickel-Cadmium batteries. Never leave the flashlight 'on' once the lamp becomes dim. Discharging the battery past this point can damage it or shorten its life.

b) Rechargeable batteries are prone to develop false memories, causing an incomplete charge to be accepted by the battery no matter how long it is charged. To offset this tendency, it is a good practice to completely discharge the battery every 2 to 3 months, thereby erasing its memory and allowing it to accept a full charge.

c) If the battery is over discharged, there may be a small leakage of alkaline electrolyte from the safety vent area on top of the cell. It appears as a white powdery substance and can affect the integrity of the electrical contact. We recommend that your battery be periodically inspected and the contact area wiped clean should any evidence of electrolyte leakage be present. Use caution when handling a battery that has leaked. The electrolyte is a strong caustic and can burn or irritate the skin and eyes.


Lithium - Ion Rechargeable Battery

Please follow the safety precaution carefully as imporper handling of Polymer lithium-ion batteries may result in injury or damage from electrolyte leakage, heating ignition or explosion.

- Never charge the battery above 4.25V.
- While charging, always observe battery polarity.
- Never charge a battery at high temperature conditions, such as near a fire.
- Never short circuit or incinerate the battery,
- Never discharge a battery to below 3.0V per cell.
- Never allow the battery to get wet or be immersed in water.
- For long period of storage, temperature should be below 45°C.
- After long period of storage, battery may require some charge/discharge cycles in order to attain the maximum operating the efficiency.

Lamp Replacement - LED FLASHLIGHT

The FLASHLIGHT are using the LED with a lifetime upto 100,000 Hrs. and thus ensures a trouble free use for many years. In the unlikely event of a lamp problem, please contact your nearest service center.



Britelite™ Frequently Asked Questions

Trouble shooting

If your light does not work, check that the batteries and bulbs are not worn out. Bulbs can be burned out with no obvious signs of damage. Make sure that the tail cap is tight; if not, electrical contact with the circuit in the barrel would not be properly made. Check if battery is installed with positive (+) end towards head of the flashlight.

The flashlight does not attain the full operating time even after charging for the specified time.

Check the line voltage. If the line voltage is less than that is required, the flashlight will require more charging time in order to complete the charging cycle.



Britelite™ Frequently Asked Questions

Is the flashlight protected against overcharging?

Yes. Your Britelite™ charging adaptor is specially designed to protect against overcharging. Please ensure to use only the Britelite™ charging adaptor supplied along with the flashlight. Using other adaptors for charging the Britelite™ flashlight will result in overcharging of the battery pack and will reduce the life span of the battery pack.

What is meant by battery memory?

A Nickel-Cadmium rechargeable battery remembers each length of discharge and after a period of time retains it, causing the battery to accept less than a full charge. This is why it is critical to 'recondition' the battery periodically.

How long can I leave the flashlight in the recharger (on charge) without using?

When not in use, it is a good practice to disconnect the unit's power plug. Self discharge would be less than 1% per day.

Is it advisable to leave the battery uncharged for a long duration?

When the light becomes dim, recharge the batteries. If left uncharged for a long period of time, this can reduce the performance of the batteries.

The operating time of the flashlight is diminishing on a regular basis.

Check line voltage. If the line voltage is as per specifications, the loss in the operating time may be due to unlikely development of false memory of the battery pack. Please discharge the battery pack and completely recharge. This will help to erase the false memory and to recharge the battery pack to its capacity.

Will my battery build a memory?

If the light is totally discharged several (5 to 6) times per year, there is very minimal chance of the battery building up a memory.

How can I clean the dust inside the reflector?

Use a small brush or blow with dry air.

How can I remove a fingerprint from the reflector?

Use a camera lens cleaner. Use a cotton swab and rub gently.

What is meant by a Limited Life time Warranty?

This means that the complete system is guaranteed but for some items the warranty terms vary from the others. In the case of Britelite™ Sentinel series Aircraft Aluminum Rechargeable flashlights, the warranty is as follows:



Britelite™ Frequently Asked Questions

Flashlight casing - Entire life term of the original registered owner

Switch - Entire life term of the original registered owner

Recharging module located within the flashlight - Entire life term of the original registered owner

Recharging adaptor - 1 year from the date of purchase

Battery pack - 6 months from the date of purchase/1000 charging cycles whichever comes first.

Reflector - Entire life term of the original registered owner

Lens - Entire life term of the original registered owner

'O' Ring - 6 months from the date of purchase

Tail cap spring - Entire life term of the original registered owner

Lamp Circuit - Lifetime warranty (will cover defects occurring from normal use only)

Can I use my Britelite™ Rechargeable Aircraft Aluminum flashlight as a diving light?

We do not recommend it. Though while it rains, dropping in puddles and other kinds of typical terrestrial events moisture would not get past the Britelite™ O-ring seals, it has not been designed for the high pressures which occur in diving environments.

Britelite™ Limited Life Time Warranty

Warranty Britelite™ Sentinel Series Aluminum Rechargeable Flashlights

Britelite™ does not make any express warranties other than mentioned herein. Britelite™ makes no, and hereby expressly disclaims, any implied warranties, including warranties of merchantability or fitness for a particular purpose, except to the extent that implied warranties may not be disclaimed under applicable law. To the extent any such implied warranties may not be disclaimed under applicable law, the duration of such implied warranties shall be limited to the minimum period required by applicable law. Britelite's accountability under all warranties, both expressed and implied, shall be limited to the repair, replacement or refund of the purchase price of any products covered by such warranty. Britelite™ shall, under no circumstances, be liable for any other damage, including consequential or incidental damages. Some court of laws may not allow the waiver of or limitations on the scope or duration of implied or expressed warranties or on the exclusion of consequential damages, in which case the above waivers, limitations or exclusion may not apply to you.

To register the warranty on your Britelite™, complete the card enclosed and send it to the mentioned address within 10 days of purchase. Retain the second portion of your Warranty Registration Card. Failure to return the Warranty Card as mentioned will invalidate the warranty and service coverage stated herein.

Britelite™ Limited Life Time Warranty

LIMITED LIFETIME FLASHLIGHT SYSTEM WARRANTY

Six Months Battery Pack Warranty and One Year Charging Adaptor Warranty.

Britelite™ warrants **to the original registered owner** that this Britelite™ Sentinel series Aircraft Aluminum Rechargeable Flashlight System is free from defects in parts and workmanship. As to the flashlight and other components of the system, except the rechargeable Nickel-Cadmium battery supplied herewith, Charging Adaptor, 'O'rings and accessories, this warranty lasts for the life of the original registered owner. As to the Nickel-Cadmium battery, this warranty lasts for six months from date of purchase. For the Charging Adaptor, the warranty lasts for one year from the date of purchase, and for the 'O'ring the warranty lasts for six months. In any country or jurisdiction where specific limitations are placed on limited lifetime warranties, Britelite™ will honor a 10-year limited Warranty. Britelite™ or an authorized Britelite™ Warranty Service Center will repair the flashlight or other system component or, at its option, replace a defective flashlight or other system component free of charge. This warranty is in lieu of all other warranties and conditions, expressed or implied.

EXCLUSION : This warranty does not cover bulb burnout, 'O'ring deterioration, or damage to or failure of the system or any component thereof due to alteration, product misuse, lack of maintenance or leakage of a Nickel-Cadmium battery more than six months after the date of purchase. (Product misuse includes, but is not limited to, installing any non-rechargeable battery or any rechargeable battery pack other than a Britelite™ battery pack or its technical equivalent, using the product for other than it's normal purposes). Repairs performed by non- authorized service workshops will invalidate the warranty. Repair or replacement under the terms of this warranty may be fulfilled with functionally equivalent reconditioned units. Replaced faulty parts or components will become the property of Britelite™.

PRODUCT USE: The Britelite™ Sentinel series rechargeable flashlights are intended for use as high intensity, heavy duty, rechargeable, portable light sources. Use of the Britelite™ for any purpose other than light sources is specifically discouraged by the manufacturer.



IMPORTANT - Be sure to use genuine **Britelite™** replacement parts.



Service Centres



Bahrain
Yaquby Stores Wll
P.O. Box: 158, Manama
Tel.: 00973210956

India
Jupiter Electronics Service Center
Jupiter Tower
Opp. Alappatt Regency
Palarivattom
Cochin 682025
0091 484-2336421 / 0091 484- 2338551

Jupiter Electronics Service Centre
4/134 Thadagam Road
K N G Pudur Cross
Coimbatore – 641108
0091 4222405149

Jupiter Electronics Service Center
Shope No.12,A-Wing
Greenfields Housing Socity
Opposite Fantacy Land
J.V.Link Road(Jogeshwary Vikroli Link road)
Andheri(E)- Mumbai-400093
PH:022-65591470
Mob: 09833661043

Jupiter Electronics
B 408, Sai Datta Appt
Iqbal Manzil
Golconda Cross Road , Hyderabad.
Tel.: 0091 40 27674478

Kuwait
Mag-ic Jupiter Tdg. Est .
P.O. Box : 22980 , Safat
Tel.: 00965 2427917

Oman
Jupiter Limited Llc
Building No. 460
Opp. Ethihad Airways
Nr. Ministry Of Commerce
Cbd Area South, Ruwi
Sultanate Of Oman
Tel.: 00968 24818491

Qatar
M/s Techno Electronics Trad Est.
Cr No: 9548/6 , Po Box 32125
Doha , Qatar.
Tel.: 00974 54690343
Mob : 00974 55142218

Saudi Arabia
Britelite Jupiter Est. For Trdng
& Marketing
Khammis Mushaith
Opp. Badurudheen Polyclinic
Khammis Mushaith
Tel./Fax : 00966 7 2200906

Thabouk
Britelite Jupiter Est. for Trdng
& Markteting
Shara Al Aam
Near Mandhi Rabeeh
Thabouk
Tel./Fax : 00966 4 4241765

Buraidah
Britelite Jupiter Est. For Trdng
& Marketing
Yamani Galle
Kubaibah Area, Near Magradi Opticals
Buraidah
Tel./Fax : 00966 6 3239752

Dammam
Britelite Jupiter Est. For Trdng & Marketing
Al Mojil Commercial Center
Prince Mohd Street
Opp. King Fahad Big Mosque
Tel./Fax : 00966 3 8330697

Jeddah
Brite Lite Jupiter Est
R No 2105 1st Floor
Al-andalus Plaza Building
Ear Eritrian Embassy School
King Fahad Street
Tel.: 0096626040474

Riyadh
Britelite Jupiter Est. For Trdng & Marketing
Opp. Security Force Hospital
Behind Hawak Rent A Car
Shara Sitheen-Malaz
P .O. Box : 350475
Tel./Fax : 00966 1 4777729
Mob : 00966 50 0312665

United Arab Emirates
Jupiter Electronics Co. Llc
P. O. Box -14148 - Dubai
Tel.: 00971 4 3969668







We, at Britelite and Vinverth believe in providing world class after sales service to our esteemed customers, through our state-of-the-art service centres in Kerala, Tamil Nadu and Andhra Pradesh. In order to achieve this, we have even comissioned our own courier company JUPITER COURIERS in Kerala, to make sure that your products are cared for, when you send them for service.

Our service centres are linked with Jupiter Couriers for fast and efficient service through a well distributed network of collection centres, that makes it more convenient for our customers to send the products for service. Jupiter Couriers will forward your products to our service centres, safe and secure.

To avail this service, all you have to do is pack your Britelite / Vinverth products which needs to be serviced and drop it in any collection centres of the couriers for a nominal charge. The courier will forward the products to us on top priority. We assure you fast and efficient service of your product. This will be then sent back to your door step through our couriers, absolutely free of cost.

At Britelite and Vinverth, we value your relationship with us. We are proud to serve you.

*Warranty terms apply

ഞങ്ങൾ, ബ്രൈറ്റ്ലൈറ്റ് ആന്റ് വിൻവർത്തിൽ, ഞങ്ങളുടെ ബഹുമാന്യരായ ഉപഭോക്താക്കൾക്ക് ലോകോത്തര നിലവാരമുള്ള വിൽപനാനന്തര സേവനം നൽകുന്നതിൽ വിശ്വസിക്കുന്നു. കേരളത്തിലെയും തമിഴ്നാട്ടിലെയും ആന്ധ്രപ്രദേശിലെയും അത്യാധുനിക സർവീസ് സെന്ററുകളിലൂടെയാണ് ഇത് സാധ്യമാക്കുക. ഈ ലക്ഷ്യം നേടാനായി നിങ്ങളുടെ ഉൽപന്നം സർവീസിന് അയക്കുമ്പോൾ, പരിരക്ഷിക്കപ്പെടുന്നുവെന്ന് ഉറപ്പാക്കാനായി ഞങ്ങൾ കേരളത്തിൽ ജൂപ്പിറ്റർ കൊറിയേഴ്സ് എന്ന സ്വന്തം കൊറിയർ കമ്പനി പോലും ആരംഭിച്ചു.

കളക്ഷൻ സെന്ററുകളുടെ ഒരു മികച്ച വിതരണ ശൃംഖലയിലൂടെ വേഗത്തിലും കാര്യക്ഷമവുമായ സേവനം ലഭ്യമാക്കാനായി ജൂപ്പിറ്റർ കൊറിയറുമായി ഞങ്ങളുടെ സർവീസ് സെന്ററുകൾ ബന്ധിപ്പിക്കപ്പെട്ടിരിക്കുന്നു എന്നത് ഉപഭോക്താക്കൾക്ക് ഉൽപന്നങ്ങൾ സർവീസിന് അയക്കൽ സൗകര്യപ്രദമാക്കുന്നു. കേരളത്തിൽ ജൂപ്പിറ്റർ കൊറിയർ നിങ്ങളുടെ ഉൽപന്നങ്ങൾ ഞങ്ങളുടെ സർവീസ് സെന്ററുകളിലേക്ക് സുരക്ഷിതമായും ഭദ്രമായും അയക്കും.

ഈ സേവനം ലഭ്യമാക്കാനായി നിങ്ങൾ ആകെ ചെയ്യേണ്ടത് നിങ്ങളുടെ സർവീസ് ചെയ്യേണ്ട ബ്രൈറ്റ്ലൈറ്റ് വിൻവർത്ത് ഉൽപന്നങ്ങൾ പായ്ക്ക് ചെയ്ത് ഈ കൊറിയറിന്റെ കളക്ഷൻ കേന്ദ്രങ്ങളിൽ എത്തിക്കുക മാത്രം. അതും വളരെ തുച്ഛമായ ചെലവിൽ. നിങ്ങളുടെ ഉൽപന്നങ്ങൾ ഏറ്റവും മുൻഗണനയോടെ ഈ കൊറിയറുകൾ ഞങ്ങൾക്ക് അയക്കും. നിങ്ങളുടെ ഉൽപന്നത്തിന്റെ വേഗത്തിലും കാര്യക്ഷമതയുള്ളതുമായ സർവീസ് ഞങ്ങൾ ഉറപ്പു നൽകുന്നു. ഞങ്ങളുടെ കൊറിയറുകളിലൂടെ നിങ്ങളുടെ വാതിൽപ്പടിയിലേക്ക് നേരിട്ട് ഇവ തിരിച്ചയക്കുകയും ചെയ്യും; അതും തികച്ചും സൗജന്യമായി.

ബ്രൈറ്റ്ലൈറ്റ് ആന്റ് വിൻവർത്തിൽ ഞങ്ങൾ നിങ്ങളുമായുള്ള ബന്ധത്തെ വിലമതിക്കുന്നു. നിങ്ങൾക്ക് സേവനം നൽകുന്നതിൽ ഞങ്ങൾ അഭിമാനിക്കുന്നു.

* വാറന്റി നിബന്ധനകൾക്ക് വിധേയം



ALAPPUZHA DISTRICT

കൂടുതൽ വിവരങ്ങൾക്ക് / അന്വേഷണങ്ങൾക്ക് വിളിക്കുക : **0484 2336421 / 2338551**

SL No.	PLACE	ADDRESS	CONTACT NUMBER	CATEGORY
1	Cherthala	X-Ray Junction, Near Aswathy Pump Shalu Shopping Complex, Cherthala	9539001681	A
2	Kayamkulam	Near Onnam Kutti (1st Mile) Junction K P (Kayamkulam - Punalur) Road Cheravally, Kayamkulam	9539001661	A
3	Alapuzha	Shop # 4/33, Cherupushpam house Pattamukku Jn, Ashramam Pathirapally Road, Alleppy	9539001707	A
4	Harippadu	NH Road, R K Junction, Near Pioneer Service Station, Haripadu	9539001679	A
5	Mavelikkara	Kurishumoodu Junction Railway Station Road, Kottarkavu Mavelikkara	9539001691	B
6	Chengannur	M C Road, Near TVS Showroom and Railway Over Bridge	9539001836	B

JUPITER Couriers

ERNAKULAM DISTRICT

കൂടുതൽ വിവരങ്ങൾക്ക് / അന്വേഷണങ്ങൾക്ക് വിളിക്കുക : 0484 2336421 / 2338551

SL No.	PLACE	ADDRESS	CONTACT NUMBER	CATEGORY
1	Muvattupuzha	Nirmala College Junction, Muvattupuzha Thodupuzha road, Muvattupuzha	9539001697	A
2	Angamali	Puthusheri House Near East Chapel, Angamali	9539001696	A
3	Perumbavoor	Perumbavoor - Aluva KSRTC Route, Palakkattu Thazhyam junction, Opp Suzuki Service Centre	9539001732	A
4	Piravom	3rd Ward, Room # 459 C, Piravom	9539001734	A
5	Cochin	Opp Alapatt Regency, Palarivattom, Cochin	9539001712	A
6	Thoppumpady	Odampilly Road, 1st Junction, RRR Shopping Complex	9539001738	A
7	Kothamangalam	Room # 25/1070, Near Yamaha Showroom, Royal Garden, College Road, Kothamangalam	9539001834	A
8	Alwaye	Thottumkam, Alwaye - Perumbavoor KSRTC Route Alwaye	9539001763	A
9	North Paravur	P.J. Square, NR. KMK Jn., Cherai Road, North Paravur	9539001747	A
10	Kuthattukulam	Near Kuthattukualm English High School High School Road, Kuthattukulam.	9539001745	A

JUPITER Couriers

IDUKKI DISTRICT

കൂടുതൽ വിവരങ്ങൾക്ക് / അന്വേഷണങ്ങൾക്ക് വിളിക്കുക : **0484 2336421 / 2338551**

SL No.	PLACE	ADDRESS	CONTACT NUMBER	CATEGORY
1	Kattapana	Kattapana - Irattayar route, Near Telephone Exchange, Siva Ranjini Tourist Home, Room # 5	9539001695	A
2	Adimali	Kottencheril Building, Library Road, Opp. Taluk Hospital, Adimali	9539001699	A
3	Thodupuzha	Thodupuzha Old Fire Station, Muvattupuzha road, Left, Near Yathra Workshop	9539001699	A
4	Nedumgandam	Room # 3, Vava Complex, Near Anna Electronics, Padinjare Kavala, Nedumkandam	9539001736	B
5	Cheruthoni	Room # 184B/Ward #8, Below LIC Office, Cheruthony - Thadiyampadu Route, Cheruthony	9539001713	A
6	Kumily	1st Floor, TC Building, Munnar Road, Kumily	9539001744	B
7	Thopramkudy	Vadakemuriyil Building Thopramkudy Junction, Near Homeo Clinic, Thopramkudy	9539190029	B



KANNUR DISTRICT

കൂടുതൽ വിവരങ്ങൾക്ക് / അന്വേഷണങ്ങൾക്ക് വിളിക്കുക : 0484 2336421 / 2338551

SL No.	PLACE	ADDRESS	CONTACT NUMBER	CATEGORY
1	Kannur	Kannur - Thalassery route, Kannunthumchal Check Post, Forest Office Road, Socio - Economic Foundation Building, Near Income Tax Office	9539001711	A
2	Payyannur	Room # 145, 152, Epe's Building, Edatt Kannanghadu Temple Stop, Opp. Side, Payyannur	9539001692	A
3	Iritty	Thavakkal Complex (Loyal College), Ground Floor	9539001693	B
4	Thalassery	Shop # 45 / 496 D, Koodapura, Main Road, Thalassery	9539001694	A
5	Thaliparambu	Near MNV Metal Industry, Vanitha Kudumbasree Building, Chinmaya Mission Road, Thaliparambu	9539001753	A
6	Sreekandapuram	Jupiter Couriers Nr. National Arts College 1st Floor, Mooppan Complex Payyavooor Road	9539190067	B



KASARGODE DISTRICT

കൂടുതൽ വിവരങ്ങൾക്ക് / അന്വേഷണങ്ങൾക്ക് വിളിക്കുക : 0484 2336421 / 2338551

SL No.	PLACE	ADDRESS	CONTACT NUMBER	CATEGORY
1	Kasergode Town	Mosco Building, Near ESI Dispensary, Chala Road, Vidya Nagar, Kasergode	9539001674	A
2	Kanhangad	Near Little Flower School	9539001705	A
3	Cheruvathur	Shop # 4 / 420, Mamiya Shopping Complex, Railway Station Road, Cheruvathur	9567860671	B
4	Uppala	Pathuvadi Road, Near K S E B, Muhammed Ali Street, Opp F M Apartment, Uppala	9539001835	B



KOLLAM DISTRICT

കൂടുതൽ വിവരങ്ങൾക്ക് / അന്വേഷണങ്ങൾക്ക് വിളിക്കുക : 0484 2336421 / 2338551

SL No.	PLACE	ADDRESS	CONTACT NUMBER	CATEGORY
1	Kollam	Opp. Mariamman Kovil Near Aarattukulam, Aasramam	9539001702 / 9567860707	B
2	Kottarakkara	Kottarakkara - Puthoor Road, Left from Market Junction, 200 Meters	9539001660	A
3	Karunagappilly	Room # 5, Kollakkaran Building, High School Junction, Railway Station Road, Karunagappilly	9539001764	A
4	Pathanapuram	Shanavas Building, Canal Road, Opp. Anish Jewellery, Pathanapuram	9539001838	A
5	Punalur	Punalur - Anchal route, Right from Junction, J J Villa	9539001663	A



KOZHIKODE DISTRICT

കൂടുതൽ വിവരങ്ങൾക്ക് / അന്വേഷണങ്ങൾക്ക് വിളിക്കുക : 0484 2336421 / 2338551

SL No.	PLACE	ADDRESS	CONTACT NUMBER	CATEGORY
1	Kozhikode	Kundooparamba Road, Puthiyaghadi Bus Stop, Calicut - Kannur Road, Calicut	9539001701	A
2	Vadagara	Near Vadakara Muncipal Office [100 meter], Haji Building, 1st Shop	9539001659	A
3	Thamarassery	New Thamarassery New Bus Stand, Ragam Theatre Road, Opp. Sarvodaya Construction, Thamarassery	9539001658	B
4	Perambra	Preambra Stand - Chenoli Road, Millenium Building (Near Dubai Bazaar) Perambra	9539001655	B
5	Koyilandy	Koyilandy New Bus Stand - Vadakara route, Civil Station bus stop, Gurukulam Road, Flat Near (Left Side) Perachan Marma Chikilsalaya	9539001657	A

JUPITER
Couriers

KOTTAYAM DISTRICT

കൂടുതൽ വിവരങ്ങൾക്ക് / അന്വേഷണങ്ങൾക്ക് വിളിക്കുക : 0484 2336421 / 2338551

SL No.	PLACE	ADDRESS	CONTACT NUMBER	CATEGORY
1	Kottayam	Ambakuzhy Trade Centre, Illikkal Junction, Illikkal, Kottayam	9539001709	A
2	Kanjirapally	Kanjirappalli - Erattupetta road, 1 KM back side of Thottumukkam Mosque	9539001686	A
3	Pala	Near Pala to Ponkunnam Bridge	9539001687	A
4	Kaduthuruthy	Appanchira Overbridge to 200 Meters, 1st Left road 600 Meter	9539001685	A
5	Erattupetta	Ettupankil Building, Near KSRTC Bus Stand, Opp IOC Pump, Erattupetta	9539001759	A
6	Karukachal	Mallapally route, Opp Karukachal Police Station road, 1st right, Market road, 1st shop (2 story building)	9539001665	A
7	Chenganassery	Room # 860 - 1, Aniyara Flats & Apartments, Ward # 14, Chenganassery	9539001762	A
8	Mundakkayam	Jupiter Couriers, Eattickel building, Opp. Bus Stand, Mundakkayam	9539001837	B
9	Ettumanoor	Above Beena Studio, Near Village Office, MC Road, Ettumanoor	9539001827	A

JUPITER Couriers

MALAPPURAM DISTRICT

കൂടുതൽ വിവരങ്ങൾക്ക് / അന്വേഷണങ്ങൾക്ക് വിളിക്കുക : 0484 2336421 / 2338551

SL No.	PLACE	ADDRESS	CONTACT NUMBER	CATEGORY
1	Tirur	Tirur - Malapuram route, Payyanangadi, Chembra Road, Best Ladies Tailoring (Upstairs)	9539001704	A
2	Chemmad	Chemmad - Mamburam Road, Opp Pentas Computer, Doctors Colony	9539001668	A
3	Nilambur	Chandakkunnu Stop, Opp Fathimagiri School, Nilambur	9539001669	B
4	Perinthalmanna	Pattambi Road , Near J.J. Hospital, Opp: Federal Bank, C.K Complex, Ground floor	9539001670	B
5	Edappal	Edappal - Trissur road (Highway), Naduvattom Stop, Opp Pilakkal Juma Masjid	9539001672	A
6	Puthanathany	Near Guide College, Puthanathany Bus Stop	9539001673	A
7	Kondotty	Kodangad Bus Stop	9539001671	B
8	Valancheri	Kizhakkekkara Road, Near C H Memorial Hospital, Perinthalmanna Main road, Valanchery	9539001758	A
9	Manchery	A M Building, Opp. Old Bus Stand Court road, Manchery	9539001729	A
10	Malapuram	Kalappadan Building, Near Mailapuram Bus Stop, Tirur Road, Malapuram - 676519	9539001748	B



PALAKKAD DISTRICT

കൂടുതൽ വിവരങ്ങൾക്ക് / അന്വേഷണങ്ങൾക്ക് വിളിക്കുക : 0484 2336421 / 2338551

SL No.	PLACE	ADDRESS	CONTACT NUMBER	CATEGORY
1	Mannarkkad	Mannarkkad Hospital Junction, Near BSNL, Palakkad Road Mannarkkad	9539001689	A
2	Pattambi	Pattambi - Guruvayur Road, Koottupatha, Thanal Building, Near Rubber Vyavasayam	9539001690	B
3	Palakkad	Bhagavathy Complex, Kadakode, Chitoore Road, Palakkad	9539001688	A
4	Ottapalam	Guruvayoor - Palakkad road, Opp. Mannarkad road Nr. East ottapalam bus stop, Ottapalam east, Ottapalam	9539001710	A
5	Shornur	Room No. 21/234B Brothers Complex, Opposite Govt Press Kulappully, Shornur 2.	9539001743	A



PATHANAMTHITTA DISTRICT

കൂടുതൽ വിവരങ്ങൾക്ക് / അന്വേഷണങ്ങൾക്ക് വിളിക്കുക : 0484 2336421 / 2338551

SL No.	PLACE	ADDRESS	CONTACT NUMBER	CATEGORY
1	Adoor	Adoor - Enath road (Kottarakkara Via), Nellimoottilpady, Right from Akash Hotel, Canal road, House # 4	9539001662	A
2	Tiruvalla	Tiruvalla - Chenganassry route, Muthoor Junction, Kuttapuzha road, Left from Guru Mandiram, House # 3	9539001703	A
3	Kozhenchery	Kozhenchery - Cherukolpuzha route, Ranny route, Melukkara Junction, Near Marthoma LP School	9539001664	A
4	Pathanamthitta	Pathanamthitta Town Kadammanitta road, Opp Alankar Hyper Market	9539001670	A

JUPITER Couriers

THRISSUR DISTRICT

കൂടുതൽ വിവരങ്ങൾക്ക് / അന്വേഷണങ്ങൾക്ക് വിളിക്കുക : 0484 2336421 / 2338551

SL No.	PLACE	ADDRESS	CONTACT NUMBER	CATEGORY
1	Thrissur	Thrissur - Guruvayur route, Poonkunnam Gramam (Agraharam), Near Sreerama Swami Temple, M G Nagar, 4th Street, Plot # 417	9539001700	A
2	Chavakkad	Panikkaveettil Building, Near Old Bridge, Chavakkad	9539001651	A
3	Chalakudy	Behind Private Bus Stand, Doctors Colony, Ground Floor, Key institute building, Adjacent to commercial tax office, Chalakudy	9539001652	A
4	Kodungallur	Kalapura Kovilakam, M G Road, Srinkapuram, Kodungaloor, Opp Shrinkapuram Siva Temple	9539001653	A
5	Wadakkanchery	Family Complex, Opp Govt hospital, Ottupara, Wadakkanchery	9539001654	A
6	Vadanapalli	Hanaa Building, Next Chilanka Theatre, Opp Indian Oil Petrol Pump, Chilanka Bus Stop, Vadanappilli	9539001739	A
7	Kunnamkulam	Adarsh Complex, Choondal, Kunnamkulam	9539001741	B
8	Irinjalakuda	Above Tazmi Stores, Civil Stattion Road, Kattingachira, Irinjalakuda	9539001746	B



TRIVANDRUM DISTRICT

കൂടുതൽ വിവരങ്ങൾക്ക് / അന്വേഷണങ്ങൾക്ക് വിളിക്കുക : 0484 2336421 / 2338551

SL No.	PLACE	ADDRESS	CONTACT NUMBER	CATEGORY
1	Trivandrum	Shop # 7, Behind Sree Padmanabha Theatre, Near Siva Temple, S P M Complex, Chalai, Trivandrum	9539001708 / 9567860693	A
2	Neyyattingara	Uthrattathi House, Neelamel Residence Association (N R A) 56, Near Neyyattingara Bus Stand	9567860711 / 9567860709	B
3	Kilimanur	Porinthaman Junction, MC Road, Kilimanoor, Trivandrum	9539001826	B
4	Attingal	Opp Girls High School, Chirayankeezhu Road, Attingal - 695101	9539001682	A
5	Nedumangad	NMC 13/728(2), New 6/146, First Floor, Veeyen Tower, Opp Indian Oil Pump, 11th Stone, Nedumangad, Pin 695541,	9539190028	B



WAYANAD DISTRICT

കൂടുതൽ വിവരങ്ങൾക്ക് / അന്വേഷണങ്ങൾക്ക് വിളിക്കുക : 0484 2336421 / 2338551

SL No.	PLACE	ADDRESS	CONTACT NUMBER	CATEGORY
1	Sulthan Bathery	Shop # K M - 6. I K Building, Near Mariyamman Temple, Opp Sulthan Bathery Court	9539001677	B
2	Mananthavady	Sreelakshmi Complex, Opp Mananthavady Bus Stop	9539001676	B
3	Kalpetta	Mundery route, Maidhani Palli, Pallithaazham Road, Near Divine Homeo Dispensary	9539001706	B
4	Cudallor	Charms Lodge Building, Near Court, 16-33 Mysore road, Cudalloor (In Tamilnadu State)	9539001678	B



TAMIL NADU


SL No.	PLACE	ADDRESS	CONTACT NUMBER	CATEGORY
1	**Coimbatore**	4/134, BMK Building, Thadagam Road, K N G Pudur Cross, Coimbatore - 108	9626477725	A
2	**Madurai**	House # 12, Suyarajapuram 2nd Main Road, Sellur, Madurai - 2	9626477727 9626477731	A
3	**Nagercoil**	Shop # 2, J Complex, Facing Parakkai Rd., Priya Nagar, Nagercoil	9626477729	A
4	**Erode**	Shop # 134/3, Sukkiramaniyavalasu, 16th Main Bus Road, Asokapuram, Erode - 4	9626477723	A
5	**Chennai**	Kathod Plaza, New # 173, Old # 85, N S C Bose Road, Sowcarpet, Chennai - 79	9626477726 9626477724	A
6	**Trichy**	No. 88C, Angalkkara Thoppu, MMB Complex, Edamalaipattiputhur, Nr. Ramachandranagar Bus Stop, Trichy - 12	9626477758	A

Britelite®™

سلسلة سنتينل
سبيكة ألمنيوم تستخدم للطائرات
مصباح قابل لإعادة الشحن


تعليمات التغشيل

المواصفات

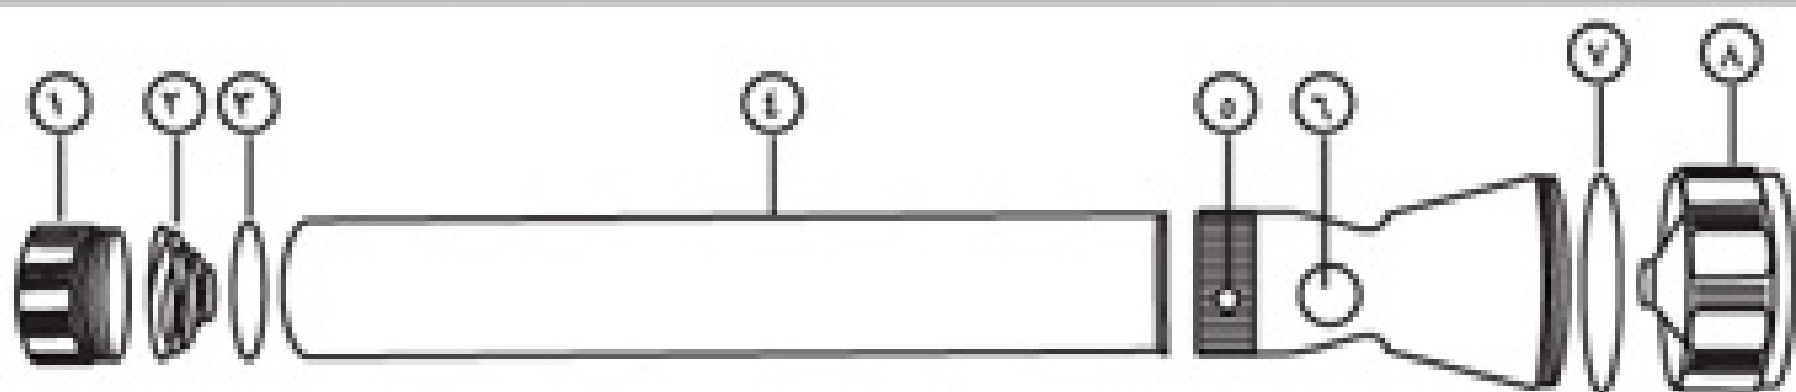

١– الغطاء الخلفي
٢– زنبرك الغطاء الخلفي
٣– حلقة على شكل حرف "O"
٤– ماسورة من الألمنيوم المستخدم لصناعة الطائرات معالجة بالأنودة
٥– مقبس شحن
٦– مفتاح
٧– حلقة على شكل حرف "O"
٨– مجموعة الغطاء الأمامي

سليبريتي LED

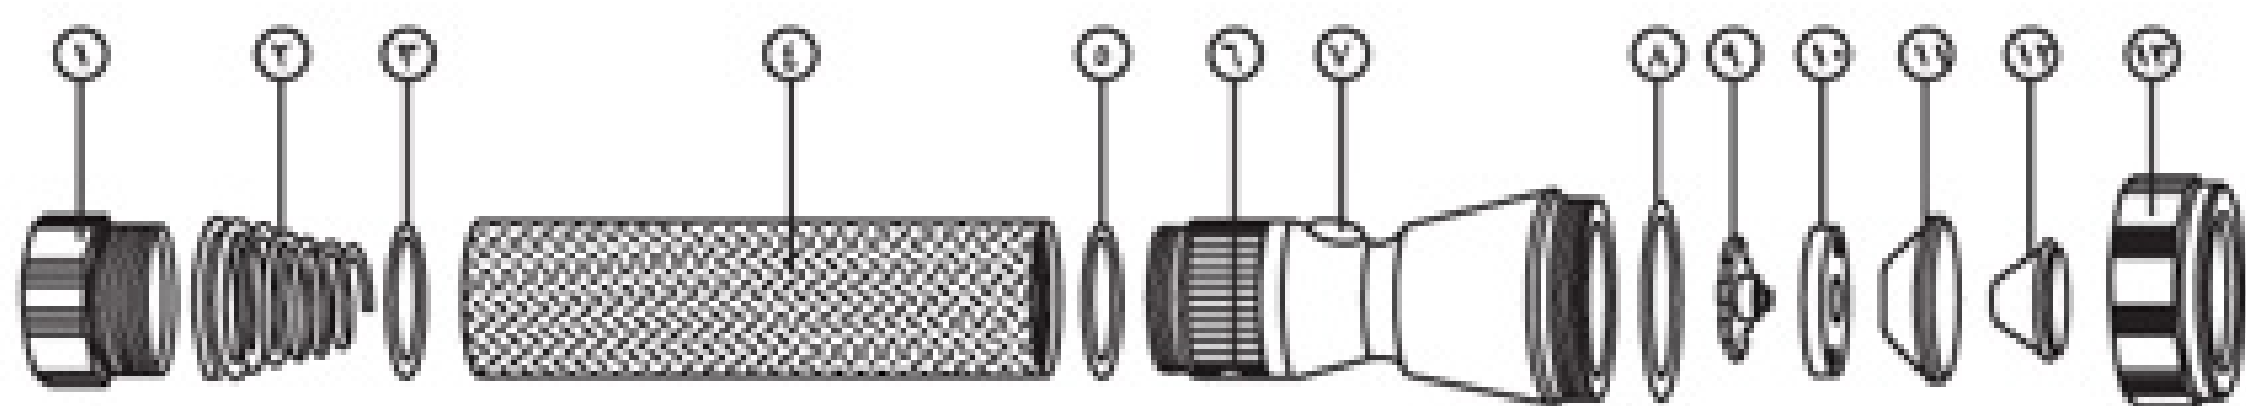

١– الغطاء الخلفي
٢– زنبرك الغطاء الخلفي
٣– حلقة على شكل حرف "O"
٤– ماسورة من الألمنيوم المستخدم لصناعة الطائرات معالجة بالأنودة
٥– حلقة على شكل حرف "O"
٦– مقبس شحن
٧– مفتاح
٨– حلقة على شكل حرف "O"
٩– LED
١٠– LED فيكسشر
١١– لوكنت
١٢– كوليميتر
١٣– مجموعة الغطاء الأمامي

المواصفات

اسم الموديل	الطول	الوزن	المادة	اللمبة	نوع البطارية	مدة الشحن	التشغيل
إمباكت هالوجين	٣٣٨ ملم	٠.٣٤ كغم	ألمنيوم الطائرات	هالوجين	٨ ساعات	5 x 1/2D Ni-cad 2200mA	١٨٠ دقيقة
برافورا هالوجين	٢٩٧.٥ ملم	٠.٣٢ كغم	ألمنيوم الطائرات	هالوجين	٨ ساعات	4 x 1/2D Ni-cad 2200mA	١٨٠ دقيقة
آرمور هالوجين	٢٦٢ ملم	٠.٣١ كغم	ألمنيوم الطائرات	هالوجينة	٨ ساعات	3 x 1/2D Ni-cad 2200mA	١٨٠ دقيقة
راديانت هالوجين	٢٩١ ملم	٠.٢٣ كغم	ألمنيوم الطائرات	هالوجين	٨ ساعات	5 x 2/3C Ni-cad 1100mA	٩٠ دقيقة
أكسبلورر هالوجين	٢٧٠ ملم	٠.١٨ كغم	ألمنيوم الطائرات	هالوجين	٨ ساعات	4 x 4/5SC Ni-cad 1300mA	٩٠ دقيقة
سفاري هالوجين	٢٣٦ ملم	٠.١٦ كغم	ألمنيوم الطائرات	هالوجين	٨ ساعات	3 x 4/5SC Ni-cad 1300mA	٩٠ دقيقة
سليبريتيLED	٢٠١ ملم	٠.١٦ كغم	ألمنيوم الطائرات	LED	١٠ ساعات	2 x SC Ni-cad 1900mA	١٨٠ دقيقة
ترافيل زينون	١٩٠ ملم	٠.٠٨ كغم	ألمنيوم الطائرات	زينون بمسمارين	٥ ساعات	2 x AA Ni-cad 700mA	٩٠ دقيقة

إجراءات السلامة

أ – يحتوي هذا الكتيب تعليمات هامة للسلامة لتشغيل برايت لايت(م) والشاحن.

ب– لا تفرغ بطاريات النيكل– الكادميوم تماماً.

اقرأ تعليمات العناية ببطاريات نيكل كادميوم واستخدامها في هذا الكتيب

جـ– تنبيه: لتقليل خطر نشوب الحريق أو حدوث الصدمة الكهربائية أو الإصابة الشخصية، لا تحاول استخدام هذا الشاحن مع أي ملحق آخر أو وحدة أخرى. وبالمثل، لا تحاول شحن برايت لايت(م) باستخدام أي شاحن آخر. تحذير: لا تضع الجهة الأمامية من برايت لايت(م) على أي سطح أثناء التشغيل، نظراً لأن الحرارة المتراكمة قدتؤدي إلى نشوب الحريق.

د – لا تتعامل بخشونة مع السلك. لا تحمل الشاحن من طرف السلك ولا تسحبه لتفصل الشاحن عن مصدر التيار.

هـ– لا تستخدم سلك توصيل. اوصل الشاحن مباشرة مع مصدر التيار الكهربائي.

و – استبدل أسلاك أو مقابس الشاحن التالفة فوراً قبل الاستعمال.

ز – افصل برايت لايت(م) عن مصدر التيار قبل محاولة القيام بأي تنظيف أو صيانة دورية. لا تحاول صلاح

ا الوحدة أو الشاحن بنفسك. دع المهمة لمركز صيانة معتمد من برايت لايت(م).

ح – لا تحرق البطارية حتى لو كانت تالفة أو مدمرة بالكامل. قد تنفجر البطارية إذا أحرقت. تعامل مع البطارية بحرص ولا تحاول تقصير الدارة الكهربائية.

ط– قد يحدث تسرب لكمية قليلة من السوائل من خلايا البطارية في حالة الإفراط في الاستعمال أو بسبب ارتفاع درجة الحرارة. وهذا لا يشير بالضرورة إلى وجود خلل. وعلى أي حال إذا انكسر الغلاف لخارجي وتسربت

ا بعض المواد إلى جسمك:

١– اغسل مكان التسرب بالماء والصابون

٢– استعمل مادة حامضية خفيفة مثل عصير الليمون أو الخل لمعادلة المادة المتسربة

٣– إذا أصاب سائل البطارية عينيك، اغسلهما بالماء لمدة لا تقل عن ١٠ دقائق واستشر الطبيب فوراً.

(ملاحظة طبية: السائل عبارة عن محلول هيدروكسيد البوتاسيوم ٢٥–٣٥٪).

ي– لا نوصي باستعمال هذا المنتج لأي غرض آخر عدا عن كونه مصدراً للإضاءة.

ك – انتبه دوماً إلى أقطاب البطارية. حيث أن البطارية المثبتة بشكل معكوس ستؤدي إلى إتلاف برايت لايت(م) عند محاولة الشحن. لا تحاول شحن أي بطاريات غير بطاريات نيكل– كادميوم الأصلية من برايت لايت(م). إن إعادة شحن أي نوع آخر من البطاريات سيؤدي إلى إتلاف المصباح.

ل – إذا كنت لا تنوي استخدام المصباح لفترات طويلة (٣ شهور أو أكثر)، انزع البطارية لتفادي التلف الكيماوي (تسرب الحامض).

م – التعرض المتواصل لأشعة الشمس أو الماء، الكيماويات، الغازات، إلخ قد يؤدي إلى بهوت اللون وربما يتسبب في تلف طبقة الحماية في مكونات الغلاف الخارجي.

ن – لا تحاول لمس اللمبة قبل مرور دقيقتين على إطفاء الجهاز. فذلك قد يؤدي إلى الإصابة بحروق خطيرة.

الصيانة الدورية

عبوة البطارية– انزع البطارية– مرة واحدة كل ٣ شهور– من المصباح وعاينها بصرياً للتحقق من علامات تسرب الغاز أو المواد الكيماوية. وإذا لاحظت وجود أي علامات يجب نزع البطارية للحيلولة دون تلف الأجزاء الداخلية للمصباح بسبب المواد الكيماوية.

الوصلات– يجب تنظيف الثلم المعدني غير المعالج بالأنودة والكائن بين الغطاء والماسورة بشكل دوري لضمان حصول التلامس الكهربائي بشكل جيد. احرص أيضاً على تنظيف الغطاء السفلي.

لوالب الحلقات على شكل حرف "O" والثلم– لحماية الحلقات على شكل حرف "O" من الجفاف ولكي تظل اللوالب تعمل بطريقة سلسة، ضع الجلي البترولي النظيف على السطوح مرتين أو ثلاث مرات سنوياً.

تعليمات التشغيل

وضعية الشاحن

يجب عدم وضع شاحن مصباح برايت لايت(م) على سطح فينيل أو أي سطح يتأثر بالحرارة أثناء الشحن. تتوفر أسلاك التيار الكهربائي المتناوب والمباشر. ولشحن المصباح، اطفئه وأدخل قابس الشحن في مقبس المصباح. اوصل الشاحن مع أي مصدر مناسب للتيار الكهربائي.

مهايئ شحن بتيار متناوب

اوصل سلك المهايئ مع مقبس شحن المصباح، فقط باستخدام مصدر تيار كهربائي متناوب في وضعية اغلاق "off". وبخلافه، قد يؤدي ذلك إلى تلف جهاز الشحن. انظر المواصفات للاطلاع على معلومات تتعلق بزمن الشحن.

ملاحظة: صمم مهايئ الشحن هذا للاستعمالات الداخلية فقط.

تركيب مهايئ التيار المباشر الاختياري

يتوفر مهايئ التيار المباشر للراغبين في تركيب مصباح برايت لايت(م) القابل لإعادة الشحن في مركباتهم. عند تركيب أو استخدام مصباح برايت لايت(م) في المركبة، احرص دوما على عدم ملامسة غلاف المصباح لبدن السيارة، فهذا قد يؤدي إلى تلف المصباح.

أدخل سلك مهايئ التيار المباشر في مقبس ولاعة السجائر بالمركبة. لا تترك المهايئ موصولاً لمدة طويلة في حالة عدم تشغيل المحرك لتفادي نفاذ البطارية.

تركيب البطارية

فك الغطاء السفلي وأدخل عبوة البطارية في الماسورة، بحيث يتم أولاً إدخال الطرف الموجب (+) مع الزر في الماسورة. أعد الغطاء السفلي إلى مكانه وشده بإحكام.

ولتفادي أي مشاكل تشغيلية أثناء الشحن، تم تغليف المصباح بدون أن يكون مشحوناً. وللحصول على أقصى وقت تشغيل، يجب شحن المصباح لمدة ١٠ ساعات قبل استعماله.

التركيز البؤري

أدر الغطاء العلوي للمصباح للحصول على أفضل نمط للموقع وأفضل بقعة تركيز بؤري.

الشحن

احرص على شحن البطارية بالكامل قبل الاستعمال. يجب شحن/تفريغ البطارية عدة دورات للوصول إلى الطاقة الكاملة للبطارية. جهاز برايت لايت(م) محمي من الشحن المفرط. انظر قسم العناية ببطارية كادميوم واستخدامها لمزيد من المعلومات عن البطارية.

لشحن برايت لايت(م)، اطفئه وأدخل قابس الشحن في مقبس المصباح. اوصل الشاحن مع مصدر التيار. تتفاوت مدة الشحن وفقاً لموديل المصباح، انظر المواصفات.

ومع تركيب اللمبة بشكل صحيح، سيعمل برايت لايت(م) لمدة ساعة واحدة على الأقل بعد شحنه بالكامل. تتفاوت مدة التشغيل وفقاً لموديل المصباح. انظر المواصفات.

ملاحظة: إن ترك المصباح في وضعية تشغيل "ON"، إذا أصبحت اللمبة خافتة، قد يؤدي إلى تلف البطارية.

استبدال اللمبة

١- انزع الغطاء السفلي والبطارية من جهاز برايت لايت(م).

لكي تنزع اللمبات من القاعدة

٢- فك الغطاء العلوي وانزعه لتكشف حامل اللمبة

٣- انزع الغطاء الحامل للمبة بإدارته باتجاه عكس عقارب الساعة

٤- انزع اللمبة وأدخل لمبة جديدة

٥- أعد الغطاء الحامل للمبة إلى مكانة

لكي تنزع لمبات Bi-Pin بمسمارين

٢- فك الغطاء العلوي وانزعه لتكشف حامل اللمبة

٣- امسك اللمبة جيداً باستخدام إصبعي الإبهام والسبابة

٤- اسحب إلى الأعلى لحين بروز مسامير اللمبة بوضوح من حامل اللمبة

٥- ضع مسامير اللمبة الجديدة في فتحتي حامل المصباح واضغط إلى الأسفل

٦- أعد الغطاء العلوي والبطارية والغطاء السفلي إلى أماكنها

٧- أصبح برايت لايت(م) جاهزاً للاستعمال الآن

٨- هناك لمبة إضافية موجودة في الغطاء السفلي

تحذير: احرص على استخدام قطع غيار برايت لايت(م) الأصلية، حيث إن استخدام قطع غيار من مصادر أخرى قد يؤثر على أداء المنتج.

ضمان محدود مدى الحياة من برايت لايت(م)

ضمان مصابيح الألمنيوم برايت لايت(م) القابلة للشحن

لا تقدم برايت لايت(م) أي ضمانات صريحة خلافاً لما هو مذكور هنا. كما أن برايت لايت(م) لاتقدم وتنفي بشكل صريح تقديم أي ضمانات ضمنية بما في ذلك ضمانات بشأن رواج المنتج في السوق وملاءمته لغرض معين، باستثناء الحالات التي لايمكن فيها التنصل من الضمانات الضمنية وفقاً للقانون المطبق. وبالنسبة لتلك الضمانات الضمنية التي لا يمكن إنكارها وفقاً للقانون المطبق، تكون مدة تلك الضمانات الضمنية بالحد الأدنى للفترة المطلوبة وفقا للقانون المطبق. وتكون مسؤولية برايت لايت(م) طبقاً لجميع الضمانات الصريحة والضمنية، محدودة بالتصليح، التبديل أو رد سعر شراء أي منتجات يغطيها ذلك الضمان. ولا يترتب على برايت لايت(م)في أي ظروف كانت أي التزامات تجاه أي أضرار أخرى، بما في ذلك الأضرار اللاحقة أو العارضة. وقد لا تسمح بعض محاكم القضاء بالتنازل عن، تقييد نطاق، تحديد مدة الضمانات الضمنية أو الصريحة أو استثناء الأضرار اللاحقة، عندئذ لا تنطبق حالات التنازل، القيود أو الاستثناءات عليك.

لتسجيل الضمان بشأن برايت لايت(م) ، املأ البطاقة المرفقة وأعدها إلى التاجر خلال ١٠ أيام من تاريخ الشراء، واحتفظ بالقسيمة الثانية من بطاقة تسجيل الضمان. وفي حال الإخفاق في إعادة بطاقة الضمان ضمن المدة المحددة فإن ذلك يلغي صلاحية الضمان وغطاء الخدمة المذكور في هذه الوثيقة.

ضمان محدود مدى الحياة على جهاز المصباح

ضمان ٦ أشهر لحزمة البطاريات وضمان عام واحد لجهاز الشحن

تضمن برايت لايت(م) للمالك المسجل الأصلي بأن جهاز مصباح الألمنيوم القابل للشحن سلسلة سينتينل من خال من العيوب المتمثلة في القطع والتصنيع. وبالنسبة للمصباح ومكونات الجهاز الأخرى، باستثناء بطارية نيكل–كادميوم القابلة للشحن المزودة بالجهاز، وجهاز الشحن، الحلقات على شكل د والملحقات، يستمر هذا الضمان طوال فترة حياة المالك المسجل الأصلي. وبالنسبة لبطارية النيكل–كادميوم، يسري هذا الضمان لمدة ٦ شهور من تاريخ الشراء. وبالنسبة لجهاز الشحن، فإن الضمان يستمر لمدة عام واحد من تاريخ الشراء، وبالنسبة للحلقة على شكل د، فإن الضمان يستمر لمدة ٦ أشهر. وفي الدول أو التشريعات التي تنص على فرض قيود محددة على الضمانات المحدودة لمدى الحياة، تقدم برايت لايت(م) ضماناً محدوداً لمدة ١٠ أعوام. تقوم برايت لايت(م) أو مركز خدمة الضمانات لشركة برايت لايت(م) المعتمد بإصلاح المصباح أو أي من مكونات الجهاز الأخرى، أو تقوم وفقاً لتقديرها باستبدال المصباح التالف أو أي من المكونات الأخرى للجهاز مجاناً. ويقوم هذا الضمان مقام جميع الضمانات والشروط الأخرى الصريحة أو الضمنية.

ضمان محدود مدى الحياة على جهاز المصباح

استثناء: لا يغطي هذا الضمان اللمبات المحترقة، تدهور حالة الحلقة على شكل د، تلف أو فشل الجهاز أو أي من مكوناته بسبب التعديل، سوء استخدام المنتج، عدم الصيانة، أو تسرب السائل من بطارية النيكل كادميوم بعد أكثر من ستة اشهر على تاريخ الشراء. (يشمل سوء استخدام المنتج، ولكن بدون تحديد، تركيب أي بطارية غير قابلة للشحن أو استخدام أي حزمة بطاريات قابلة للشحن خلافا للأغراض المخصصة لها). وإن أي إصلاحات تقوم بها ورش خدمة غير معتمدة تفقد الضمان صلاحيته. ويجوز القيام بعمليات الإصلاح أو الاستبدال القطع وفقاً لشروط هذا الضمان باستخدام وحدات مشابهة في الوظيفة. وتصبح القطع أو المكونات التالفة المستبدلة ملكاً لشركة برايت لايت(م).

استخدام المنتج : إن مصابيح برايت لايت(م) القابلة للشحن سلسلة سينتينل مخصصة للاستخدام كمصدر ضوء متحرك عالي الشدة، قوي وقابل للشحن. تؤكد الشركة الصانعة على عدم استخدام منتجات برايت لايت(م) لأي غرض غير كونها مصادر للضوء.

هام : تأكد من استخدام قطع غيار برايت لايت(م) الأصلية.



WARRANTY REGISTRATION CARD

Britelite™ Model Name: .... Batch Code: ....

Dealer Name & Address: ....

.... Date of Purchase: ....

Name of Customer: ....

Address: ....

Phone: ....

Please return this warranty card duly filled within 10 days to validate the warranty to:

Britelite Middle East FZCO
P O Box 18087
Jebel Ali - Dubai
United Arab Emirates



WARRANTY CARD

Date of Purchase: ....

Britelite™ Batch Code: .... Model Name: ....

Name of Customer: ....

Name of Dealer: ....

This portion of the warranty card is to be retained by the Customer.
If Customer cannot present this card and official purchase receipt, repair / service will be on a chargeable basis.

Britelite Middle East FZCO
P O Box 18087
Jebel Ali - Dubai
United Arab Emirates

DEALER'S COMPANY CHOP





To: Britelite Middle East FZCO
P O Box 18087
Jebel Ali - Dubai
United Arab Emirates

There's no compromise in our quest to maintain our standards of quality, advanced technology, total customer satisfaction and complete service. The popularity of our user-friendly products is a sign of our success.





Brightworld™

Sentinel series
Aircraft Aluminum Alloy
Rechargeable Flashlight system

Operating Instructions

www.briteliteworld.com www.vinverth.com